

## NPN Transistors Darlington Amplifier

\* We declare that the material of product compliance with RoHS requirements.



**Lead(Pb)-Free**

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	$V_{CEO}$	40	Vdc
Collector–Base Voltage	$V_{CBO}$	40	Vdc
Emitter–Base Voltage	$V_{EBO}$	12	Vdc
Collector Current — Continuous	$I_C$	500	mAdc

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR– 5 Board, (1) $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	225	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate, (2) $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	300	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$

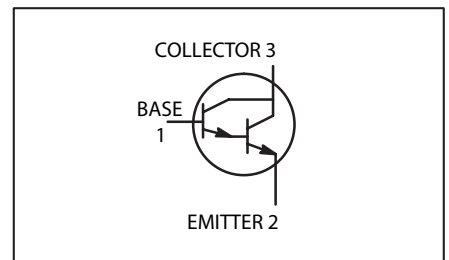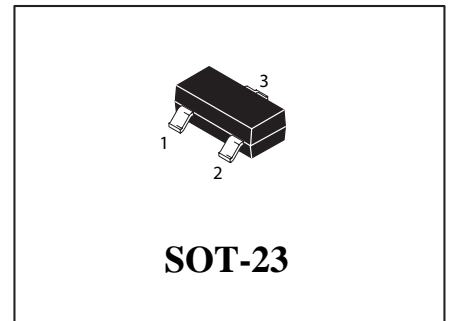

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

### OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage(3) ( $I_C = 10 \text{ mAdc}, V_{BE} = 0$ )	$V_{(BR)CEO}$	40	—	V
Collector–Base Breakdown Voltage ( $I_C = 100 \mu\text{Adc}, I_E = 0$ )	$V_{(BR)CBO}$	40	—	V
Emitter–Base Breakdown Voltage ( $I_E = 10 \mu\text{Adc}, I_C = 0$ )	$V_{(BR)EBO}$	12	—	V
Collector Cutoff Current ( $V_{CE} = 25\text{Vdc}, I_B = 0$ )	$I_{CES}$	—	1.0	$\mu\text{A}$
Collector Cutoff Current ( $V_{CB} = 30\text{Vdc}, I_E = 0$ )	$I_{CBO}$	—	50	nA
Emitter Cutoff Current ( $V_{EB} = 10\text{Vdc}, I_C = 0$ )	$I_{EBO}$	—	50	nA

1. FR–5 = 1.0 x 0.75 x 0.062 in.

2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Max	Unit
<b>ON CHARACTERISTICS</b>				
DC Current Gain (I <sub>C</sub> = 10 mAdc, V <sub>CE</sub> = 5.0 Vdc) (I <sub>C</sub> = 100 mAdc, V <sub>CE</sub> = 5.0Vdc) (I <sub>C</sub> = 500 mAdc, V <sub>CE</sub> = 5.0Vdc)	h <sub>FE</sub>	10,000 20,000 14,000	100,000 200,000 140,000	—
Collector–Emitter Saturation Voltage (I <sub>C</sub> = 50 mAdc, I <sub>B</sub> = 0.5 mAdc) (I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 0.5 mAdc)	V <sub>CE(sat)</sub> (3)	— —	1.2 1.5	V
Base–Emitter Saturation Voltage (I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 0.5 mAdc)	V <sub>BE(sat)</sub>	—	2.0	V
Base–Emitter On Voltage (I <sub>C</sub> = 50 mAdc, V <sub>CE</sub> = 5.0Vdc)	V <sub>BE(on)</sub>	—	1.75	V
<b>SMALL–SIGNAL CHARACTERISTICS</b>				
Output Capacitance (V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)	C <sub>obo</sub>	—	7.0	pF
Input Capacitance (V <sub>EB</sub> = 0.5 Vdc, I <sub>C</sub> = 0, f = 1.0 MHz)	C <sub>ibo</sub>	—	15	pF
Current Gain–High Frequency (V <sub>CE</sub> = 5.0 Vdc, I <sub>C</sub> = 10mAdc, f = 100 MHz)	h <sub>fe</sub>	1.3	—	V
Noise Finure (V <sub>CE</sub> = 5.0 Vdc, I <sub>C</sub> = 1.0 mAdc, R <sub>S</sub> = 100 kΩ, f = 1.0 kHz)	NF	—	10	dB

3. **Pulse Tent:** Pulse Width = 300μs, Duty Cycle = 2.0%

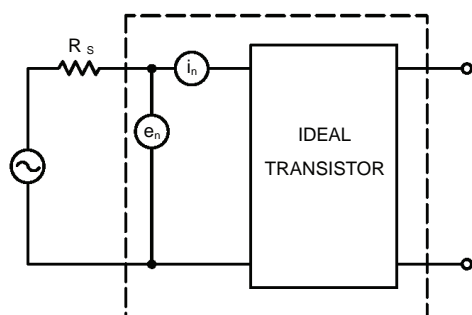


Figure 1. Transistor Noise Model

### NOISE CHARACTERISTICS

(V<sub>CE</sub> = 5.0 Vdc, T<sub>A</sub> = 25°C)


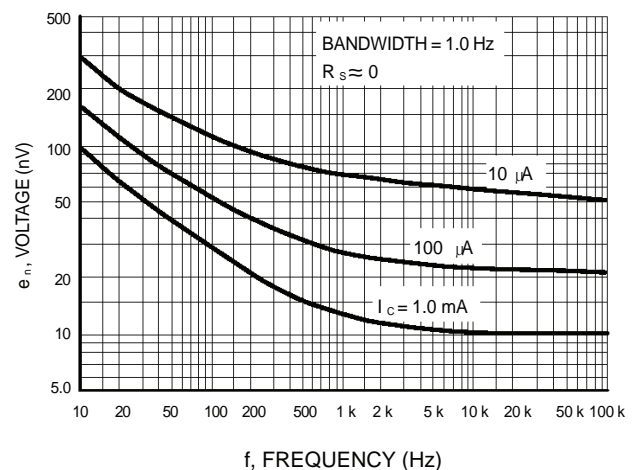



Figure 2. Noise Voltage

NOISE CHARACTERISTICS


( $V_{CE} = 5.0 \text{ Vdc}$ ,  $T_A = 25^\circ\text{C}$ )

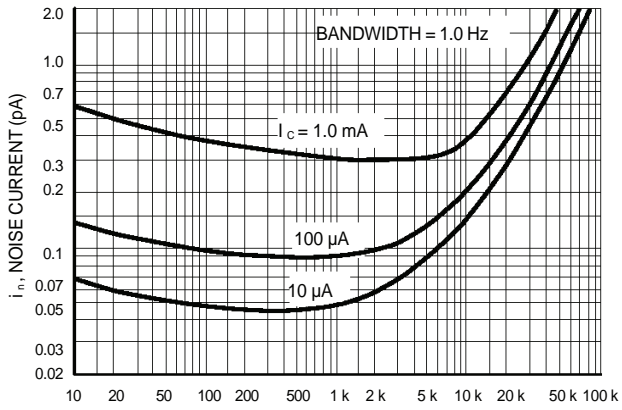


f, FREQUENCY (Hz)  
Figure 3. Noise Current

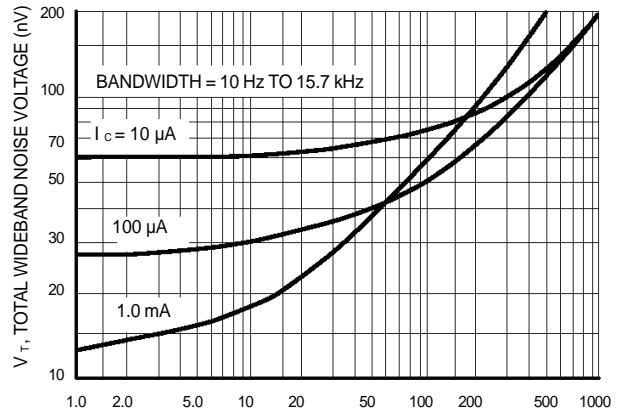


$R_s$ , SOURCE RESISTANCE ( $k\Omega$ )  
Figure 4. Total Wideband Noise Voltage

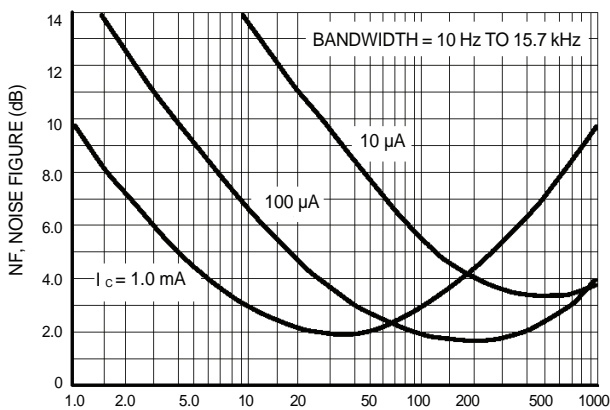


$R_s$ , SOURCE RESISTANCE ( $k\Omega$ )  
Figure 5. Wideband Noise Figure

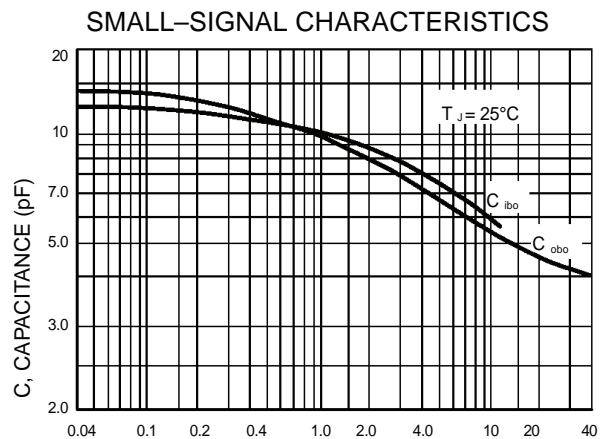

$V_R$ , REVERSE VOLTAGE (VOLTS)  
Figure 6. Capacitance

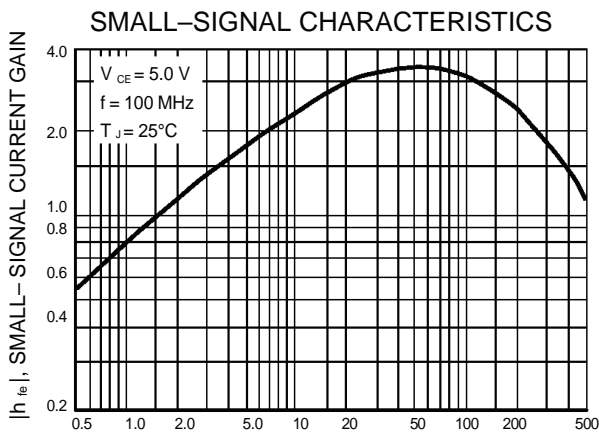

$I_c$ , COLLECTOR CURRENT (mA)  
Figure 7. High Frequency Current Gain

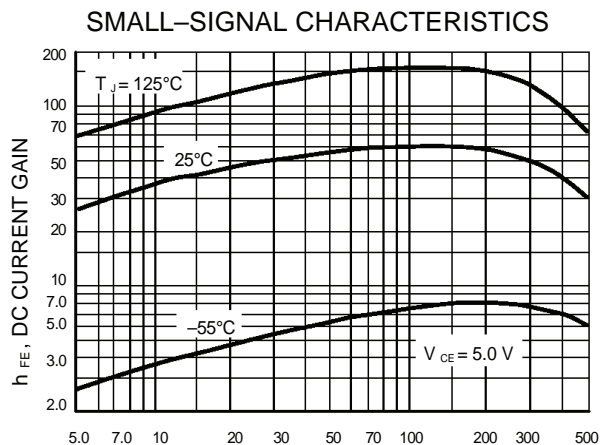

$I_c$ , COLLECTOR CURRENT (mA)  
Figure 8. DC Current Gain

## SMALL-SIGNAL CHARACTERISTICS

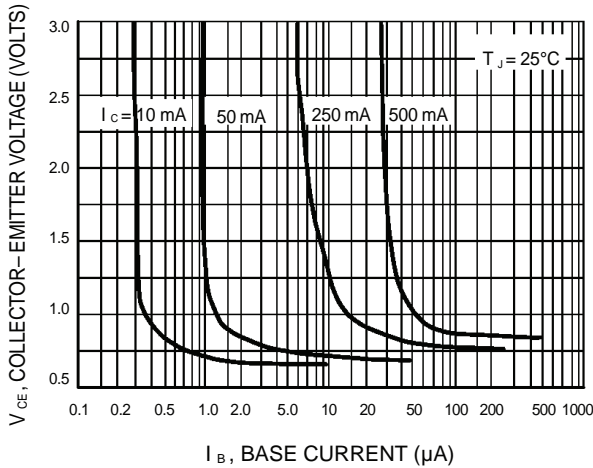


Figure 9. Collector Saturation Region

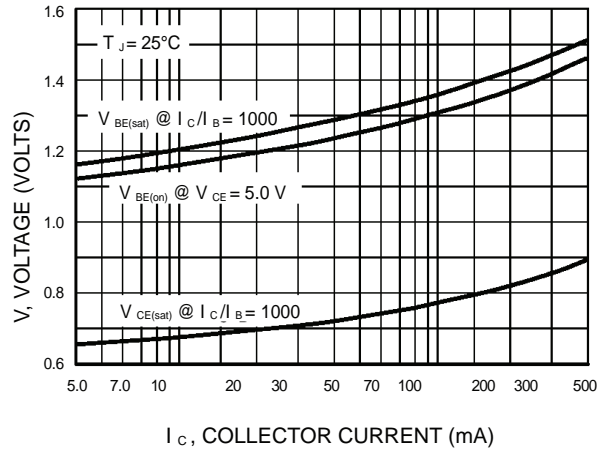


Figure 10. "On" Voltages


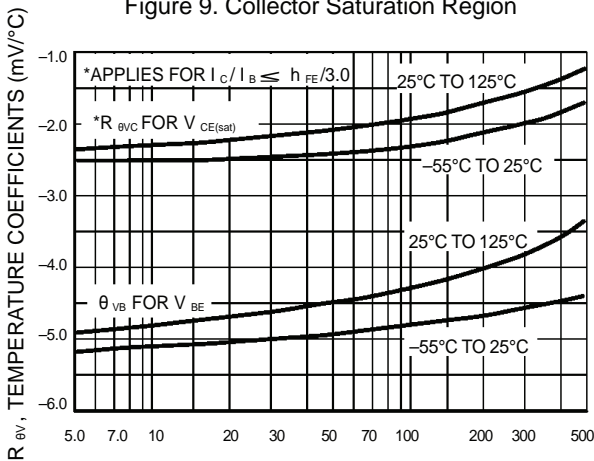


Figure 11. Temperature Coefficients

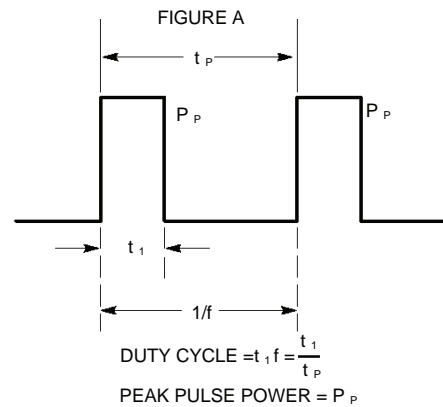

Design Note: Use of Transient Thermal Resistance Data


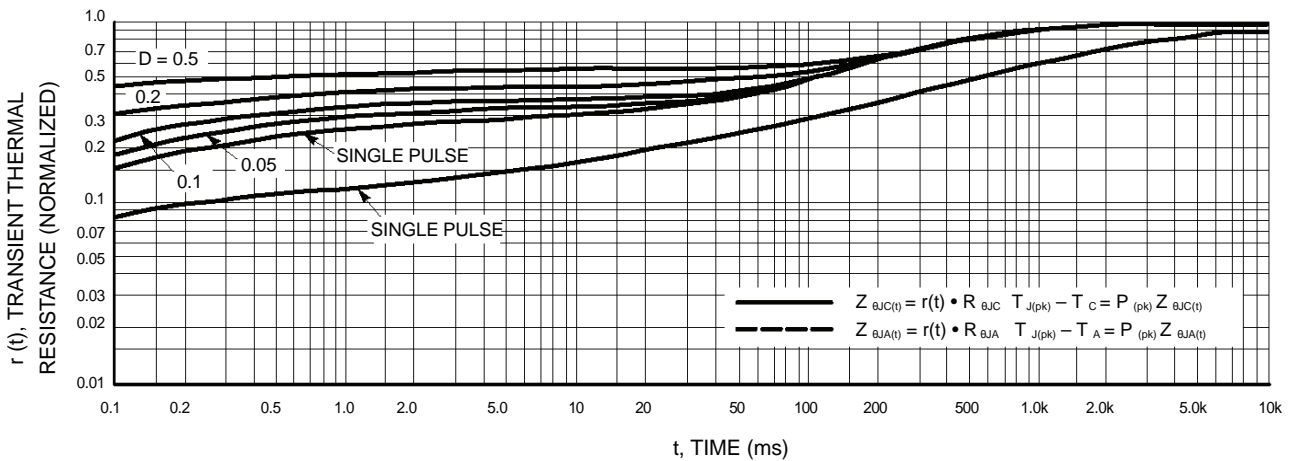


Figure 12. Thermal Response

**SOT-23 Package Outline Dimensions**

Unit:mm

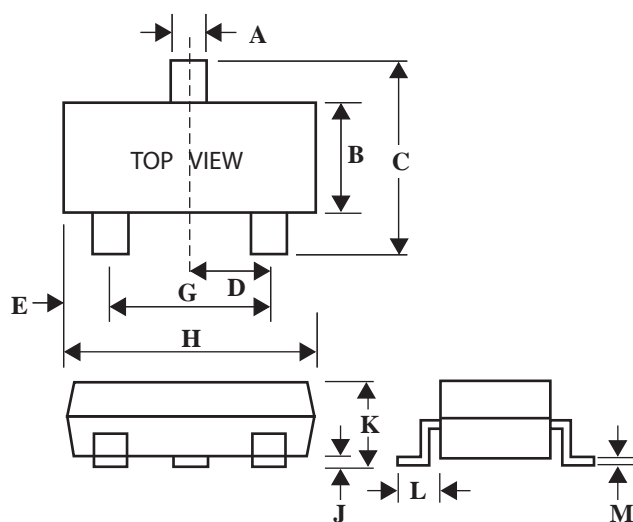

Dim	Min	Max
A	0.35	0.51
B	1.19	1.80
C	2.10	3.00
D	0.85	1.05
E	0.46	1.00
G	1.70	2.10
H	2.70	3.10
J	0.01	0.13
K	0.89	1.60
L	0.30	0.61
M	0.076	0.25